

Customer		Job Ref	Signed:
Date req.	Collect <input type="checkbox"/>	Delivery address	
	Deliver <input type="checkbox"/>		


Please use one order form per profile finish  
All dimensions should include cill and add on's/couplers  
All sketches to be viewed from outside

Cill will be 150mm concealed drainage unless otherwise specified  
When Trickle Vents are requested, they will be fitted to the sash unless otherwise specified

Drops and Widths as Standard Doors open inward as Standard Standard Drops: = 400mm • Widths: = 600mm • Fire Escapes: = 625mm • Door Mid Rail: = 850mm

**Fire Escape / Egress Hinges:** When ordering fire escape sashes for new build the minimum sizes are 625 wide & 1000 high (to comply with the Fire Regulations). Any fire escapes ordered below these sizes will be taken automatically as replacement jobs.

<b>Profile Finish</b>	WHITE <input type="checkbox"/>	OAK <input type="checkbox"/>	OAK ON WHITE <input type="checkbox"/>	ROSE WOOD <input type="checkbox"/>	ROSE WOOD ON WHITE <input type="checkbox"/>	CREAM GRAIN <input type="checkbox"/>	BLACK GRAIN ON WHITE <input type="checkbox"/>	WHITE GRAIN <input type="checkbox"/>	ANTHRACITE GREY (GRAINED) ON WHITE <input type="checkbox"/>
<b>Handle colour</b>	WHITE <input type="checkbox"/>	GOLD <input type="checkbox"/>	BLACK <input type="checkbox"/>	CHROME <input type="checkbox"/>	SATIN SILVER <input type="checkbox"/>				

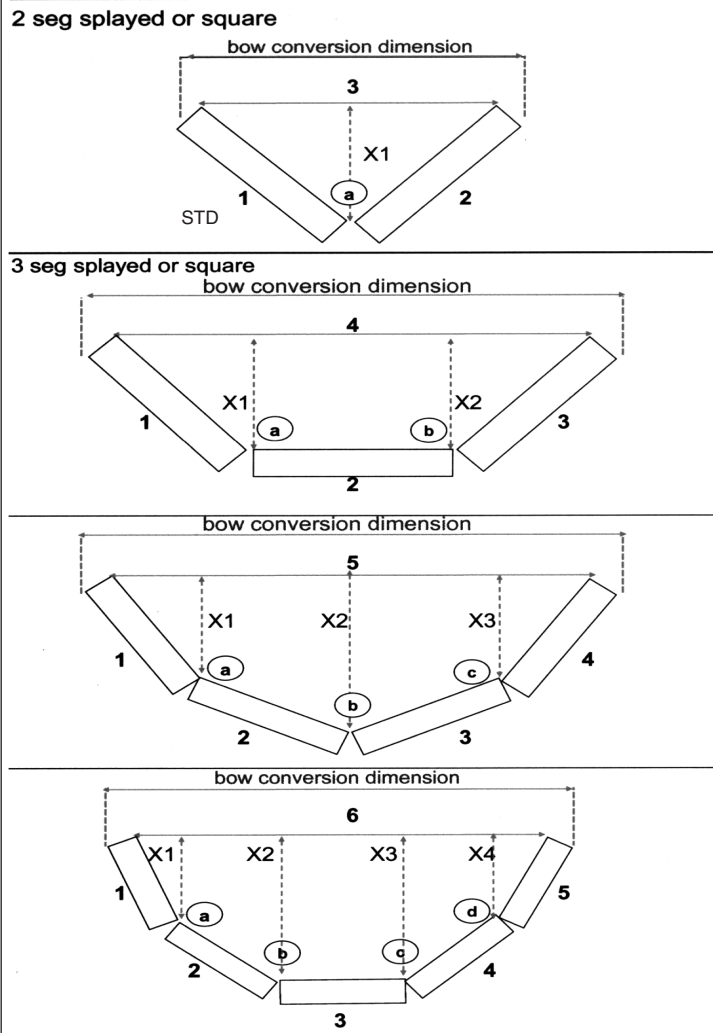

All dimensions must be internal and will be treated as manufacturing sizes unless otherwise stated

<b>IS THERE CURRENTLY A BAY WINDOW THERE:</b>		YES	NO
<b>IS THE BAY SITTING ON:</b>		BRICKWORK	or GALLOWS
<b>OUTERFRAME REQUIRED:</b>		52	62 72
<b>CILL PROJECTION REQUIRED (stub, 150 etc):</b>			
<b>HEIGHT (including cill):</b>			
Angles ( ° ' s )	a =	or Projection Internal	X1 =
	b =		X2 =
	c =		X3 =
	d =		X4 =
	e =		X5 =
<b>Please tick box to indicate which post / pole is required</b>		<b>Segment sizes and back span internal</b>	
No Poles - frame to frame		1 =	
No Poles or Covers		2 =	
90 ° Square posts		3 =	
Round poles & adaptors		4 =	
		5 =	
		6 =	
bow conversion dimension external brick work opening		7 =	

**6 seg splayed or square**  
bow conversion dimension  
7  
X1 X2 X3 X4 X5  
1 2 3 4 5 6  
a b c d e

**Segment designs and specification VIEWED FROM OUTSIDE**

Segment 1	Segment 2	Segment 3	Segment 4	Segment 5	Segment 6
15 ADD ON'S 45	ADD ON'S	ADD ON'S	ADD ON'S	ADD ON'S	ADD ON'S
TOP LEFT RIGHT	TOP LEFT RIGHT	TOP LEFT RIGHT	TOP LEFT RIGHT	TOP LEFT RIGHT	TOP LEFT RIGHT
BOTTOM RIGHT	BOTTOM RIGHT	BOTTOM RIGHT	BOTTOM RIGHT	BOTTOM RIGHT	BOTTOM RIGHT

**GLAZING DETAILS**

Clear		Glass Décor	If trickle vents are required please indicate their position on the segment drawings above  They will be fitted in sashes unless otherwise indicated
Float			
Toughend below transom	Transom drop 400 STD		
Low-E Glass	Mullion position		